

3-BAR MOUNTED CHISEL PLOWS

WITH 1" OR 1-1/4" x 2" x 26" OR 1-1/4" x 2" x 32" SHANKS



11 FT. MOUNTED CHISEL PLOW with 32 inch shanks and spring clamp assemblies with gauge wheels and reversible regular chisel points. Safety lights standard equipment.

Approximate Set Up Time: 1/4 hour per shank
Drawbar Horsepower Required: 10-15 HP per shank

HOW TO ORDER

- STEP 1:** Select one item from Box A (basic frame) below.
- STEP 2:** Select one item from Box B either 26" or 32" shanks (regular or heavy duty) with spring or rigid clamp (one needed per foot) below.
- STEP 3:** Select one item from either Box C (reversible regular chisel points) below or one item from Box D (reversible twisted chisel points) below.
- STEP 4:** Select one item from Box E (gauge wheel kit) on page 29 for either the 26" or 32" shanks you chose in Step 2. Gauge wheels are always recommended; however, in light soil and row crop work, gauge wheels may not be necessary.

BOX A: BASIC FRAMES (Includes Hitch for Category II or III 3-point and/or quick coupler.)

Model	Working Width	O.A. Width	Basic Frame Section & Size of Extension	Weight	Suggested List Price
CPP-7	7'	7'6"	Basic 7' frame section	604 lbs.	
CPP-9	9'	8'7"	(Includes basic 7' frame w/2' extension kit)	636 lbs.	
CPP-10	10'	10'6"	Basic 10' frame section	723 lbs.	
CPP-11	11'	11'6"	(Includes basic 7' frame w/4' extension kit)	779 lbs.	
CPP-12	12'	11'7"	(Includes basic 10' frame w/2' extension kit)	755 lbs.	
CPP-13	13'	12'8"	(Includes basic 7' frame w/6' extension kit)	909 lbs.	
CPP-14	14'	14'6"	(Includes basic 10' frame w/4' extension kit)	897 lbs.	
CPP-16	16'	15'8"	(Includes basic 10' frame w/6' extension kit)	1028 lbs.	

BOX B: SHANK & CLAMP ASSEMBLIES (One Shank & Clamp assembly needed per foot) LESS POINTS

Part No.	Description	Weight	Suggested List Price
RC-26	Shank & rigid clamp assy. (1" x 2" x 26")	39 lbs.	
SC-261	Shank & spring clamp assy. (1" x 2" x 26")	80 lbs.	
RCH-32	Heavy duty shank & rigid clamp assy. (1-1/4" x 2" x 32")	51 lbs.	
SCH-321	Heavy duty shank & spring clamp assy. (1-1/4" x 2" x 32")	92 lbs.	
RCH-26	Heavy duty shank & rigid clamp assy. (1-1/4" x 2" x 26")	46 lbs.	
SCH-261	Heavy duty shank & spring clamp assy. (1-1/4" x 2" x 26")	82 lbs.	


BOX C: REVERSIBLE REGULAR CHISEL POINTS (5/8" x 2" x 15") with Bolts, Nuts & Lockwashers

Part No.	Description	Weight	Suggested List Price
6D-759	Box of 7 for CPP-7	35 lbs.	
6D-760	Box of 9 for CPP-9	45 lbs.	
6D-165	Box of 10 for CPP-10	50 lbs.	
6D-761	Box of 11 for CPP-11	55 lbs.	
6D-166	Box of 12 for CPP-12	60 lbs.	
6D-762	Box of 13 for CPP-13	65 lbs.	
6D-167	Box of 14 for CPP-14	70 lbs.	
6D-168	Box of 16 for CPP-16	80 lbs.	

BOX D: REVERSIBLE TWISTED SHOVELS (3/8" x 3" x 19-1/2") with Bolts, Nuts & Lockwashers

Part No.	Description	Weight	Suggested List Price
6D-763	Box of 7 for CPP-7	45 lbs.	
6D-764	Box of 9 for CPP-9	58 lbs.	
6D-173	Box of 10 for CPP-10	67 lbs.	
6D-765	Box of 11 for CPP-11	70 lbs.	
6D-174	Box of 12 for CPP-12	77 lbs.	
6D-766	Box of 13 for CPP-13	83 lbs.	
6D-175	Box of 14 for CPP-14	90 lbs.	
6D-176	Box of 16 for CPP-16	102 lbs.	

OPTIONAL EQUIPMENT ON FOLLOWING PAGE

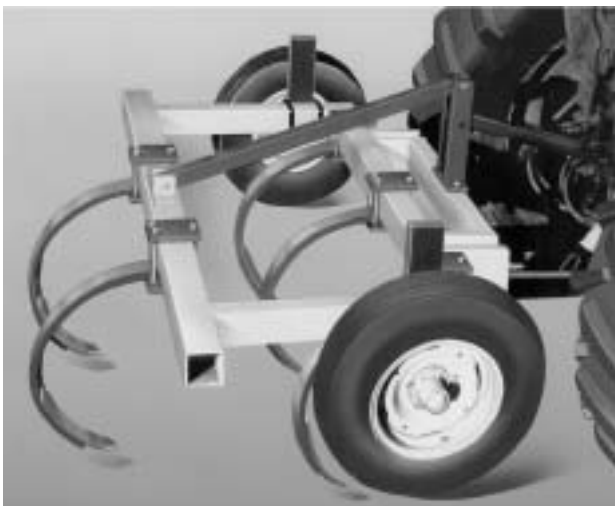

MOUNTED 2-Bar Category II **CHISEL PLOWS** WITH 1" x 2" x 26" SHANKS

These models are offered with 1" x 2" x 26" shanks with either rigid or spring clamps. Working depth is 2" to 12". Shank spacing is 12". Units are priced complete with shanks but less points or shovels. Gauge wheels are optional equipment. Approximate Set Up Time: 1/4 hour per shank. Drawbar Horsepower Required: 10-15 per shank.

Model No.	Description	Weight (Without Points or Gauge Wheels)	Suggested List Price
CPPR2-5	Unit with 5 rigid type 26" shanks	455 lbs.	
CPPS21-5	Unit with 5 spring type 26" shanks	590 lbs.	
CPPR2-7	Unit with 7 rigid type 26" shanks	533 lbs.	
CPPS21-7	Unit with 7 spring type 26" shanks	722 lbs.	

OPTIONS FOR 2-BAR MOUNTED CHISEL PLOWS (ABOVE)

Part No.	Description	Weight	Suggested List Price
9D-986	Gauge Wheel Kit (includes 2 - 7.60 x 15 6 Ply Tires)	176 lbs.	
9D-991	Box of 5 — 5/8" x 2" x 15" Chisel Points	25 lbs.	
9D-993	Box of 5 — 3/8" x 3" x 19-1/2" Twisted Shovels	33 lbs.	
6D-759	Box of 7 — 5/8" x 2" x 15" Chisel Points	35 lbs.	
6D-763	Box of 7 — 3/8" x 3" x 19-1/2" Twisted Shovels	45 lbs.	

Above items include mounting hardware.

OPTIONAL EQUIPMENT (FOR 3-BAR MOUNTED CHISEL PLOWS ON PAGE 24)

BOX E: GAUGE WHEEL KITS

Gauge Wheel Kits are always recommended; however, in light soil and row crop work, gauge wheels may not be necessary. One kit required per machine — includes 2-15" rims and 2- 7.60 x 15 6 Ply Tires.

Part No.	Description	Weight	Suggested List Price
7D-441	Gauge Wheel Kit for use with 26" shanks	177 lbs.	
6D-946	Gauge Wheel Kit for use with 32" shanks (Can be used with 26" shanks)	189 lbs.	

BOX F: OPTIONAL EQUIPMENT

Part No.	Description	Weight	Suggested List Price
6D-226	2' Extension Kit (converts 7' to 9'; 10' to 12')	35 lbs.	
6D-227	4' Extension Kit (converts 7' to 11'; 10' to 14')	198 lbs.	
6D-228	6' Extension Kit (converts 7' to 13'; 10' to 16')	343 lbs.	
8D-515	2' Extension Kit (converts 11' to 13'; 14' to 16')	155 lbs.	