


FLOATING RING PULVERIZERS

THREE POINT HITCH MOUNTED

Ductile Iron Rings carry a 2-Year Limited Warranty against breakage.

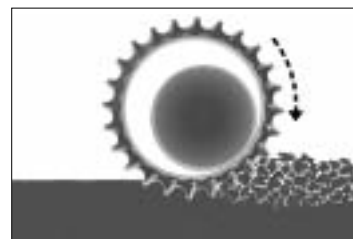

Floating ring pulverizers feature the ability of the rings to follow the contours of the ground to provide uniform firming action. Floating Ring Pulverizer wheels are very aggressive and should not be used behind seeders and planters for firming purposes.

MACHINE SPECIFICATIONS

| | |
|-----------------------|----------------------------------|
| Ductile Iron Rings | Mainframe 7" x 7" |
| 2 Year Ring Warranty | Category II & III Hitch |
| Parking Stand | 1 15/16" Pillow Block Bearings |
| Safety Warning Lights | Approximate Set Up Time: 2 hours |

RING SPECIFICATIONS


| Ring Designation | Part Number | Outside Diameter | Inside Diameter | Approx. Weight |
|------------------|-------------|------------------|-----------------|----------------|
| B | 4K-392 | 20" | 14" | 34 lbs. |

| Model Number | Rolling Width | Transport Width | No. Wheels | Wheel Size | Tube O.D. | Approx. Weight | Suggested List Price |
|--------------|---------------|-----------------|------------|------------|-----------|----------------|----------------------|
| PPF6B12 | 6' | 7'4" | 30 | 20/14 | 12" | 1601 lbs. | |
| PPF8B12 | 8' | 9'4" | 40 | 20/14 | 12" | 2020 lbs. | |
| PPF10B12 | 10' | 11'4" | 50 | 20/14 | 12" | 2580 lbs. | |
| PPF12B12 | 12' | 13'4" | 60 | 20/14 | 12" | 3056 lbs. | |
| PPF14B12 | 14' | 15'4" | 70 | 20/14 | 12" | 3490 lbs. | |
| PPF15B12 | 15' | 16'4" | 75 | 20/14 | 12" | 3729 lbs. | |
| PPF16B12 | 16' | 17'4" | 80 | 20/14 | 12" | 3924 lbs. | |
| PPF17B12 | 17' | 19'4" | 85 | 20/14 | 12" | 4350 lbs. | |
| PPF18B12 | 18' | 19'4" | 90 | 20/14 | 12" | 4385 lbs. | |

6K-406 Rear Hitch Kit (Will not work on pull-type models)

135 lbs.

TRANSPORT MODELS

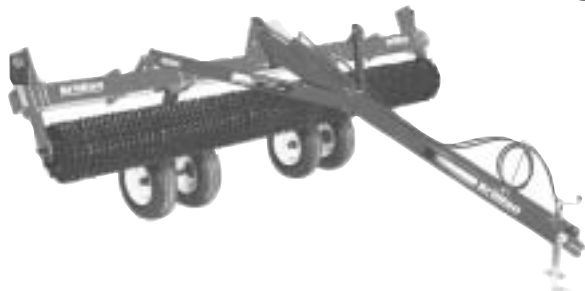

MACHINE SPECIFICATIONS

| | |
|--|----------------------------------|
| Ductile Iron Rings | Mainframe 7" x 7" |
| Tongue Jack | Tongue 6" x 6" x 144" |
| 4" x 16" Hydraulic Cylinder | 1 15/16" Pillow Block Bearings |
| 15 x 8" Rims with 2 - 11L x 15 8 Ply Tires | 2 Transport Axles (Standard) |
| Safety Warning Lights | Dual Wheels (Optional) |
| Hydraulic Hose Kit | 4 Transport Axles (Optional) |
| | Approximate Set Up Time: 3 hours |

| Model Number | Rolling Width | Transport Width | No. Wheels | Wheel Size | Tube O.D. | Approx. Weight | Suggested List Price |
|--------------|---------------|-----------------|------------|------------|-----------|----------------|----------------------|
| PFT10B12 | 10' | 11'4" | 50 | 20/14 | 12" | 3205 lbs. | |
| PFT12B12 | 12' | 13'4" | 60 | 20/14 | 12" | 3681 lbs. | |
| PFT14B12 | 14' | 16'4" | 70 | 20/14 | 12" | 4115 lbs. | |
| PFT15B12 | 15' | 16'4" | 75 | 20/14 | 12" | 4354 lbs. | |
| PFT16B12 | 16' | 17'4" | 80 | 20/14 | 12" | 4549 lbs. | |
| PFT17B12 | 17' | 19'4" | 85 | 20/14 | 12" | 4775 lbs. | |
| PFT18B12 | 18' | 19'4" | 90 | 20/14 | 12" | 4998 lbs. | |

OPTIONAL EQUIPMENT

| Part No. | Description | Weight | Suggested List Price |
|----------|---|----------|----------------------|
| 5K-168 | Dual Wheel Kit (Includes 2 - 11L x 15 8 Ply Tires) | 156 lbs. | |
| 5K-167 | Single Wheel Arm Kit (Includes 1 - 11L x 15 8 Ply Tire) | 148 lbs. | |
| 1K-822 | Safety Chain Kit | 9 lbs. | |