

M MODEL PULVI-MULCHERS


The 88" Pulvi-Mulcher has the basic features of the larger "M" series in the Brillion line. It uses single transport wheels. Rear scrapers on notched rollers and drawbar jack are standard. Machine is raised and lowered by a 3" x 8" hydraulic cylinder (not furnished). Two rows of spring teeth manually operated with depth control lever. Hydraulic tooth control NOT available with this model. Includes 2 - 7.60 x 15 6 Ply Tires. Approximate Set Up Time: 6 hours. Drawbar Horsepower Requirements: 6/8 per ft.



Model No.	Front Roller	Rear Roller	Rolling Width	Overall Width	No. of Teeth	Approx. Weight	Suggested List Price
WITH CONVENTIONAL "C" TEETH							
M-881	Notched	Notched	7'4"	7'10"	13	2934 lbs.	
MC-881	Crowfoot	Notched	7'4"	7'10"	13	2824 lbs.	
MCC-881	Crowfoot	Crowfoot	7'4"	7'10"	13	2739 lbs.	
WITH S-TINE TEETH - POINTS NOT INCLUDED, ORDER FROM OPTIONS BELOW							
MS-881	Notched	Notched	7'4"	7'10"	13	2944 lbs.	
MCS-881	Crowfoot	Notched	7'4"	7'10"	13	2814 lbs.	
MCCS-881	Crowfoot	Crowfoot	7'4"	7'10"	13	2724 lbs.	

OPTIONAL EQUIPMENT

4J-637	Travel Link					33 lbs.	
4J-635	Land Leveler Kit					57 lbs.	
4J-625	Front Scraper Kit for notched rollers					54 lbs.	
2J-149	1-3/8" Heavy Duty Reversible S-Tine Point with Attaching Hardware					1 lb.	
2J-150	2-3/4" Shovel with attaching hardware for S-tines					1 lb.	
1K-822	Safety Chain Kit					9 lbs.	
9K-363	Hydraulic Cylinder & Hose Kit					40 lbs.	

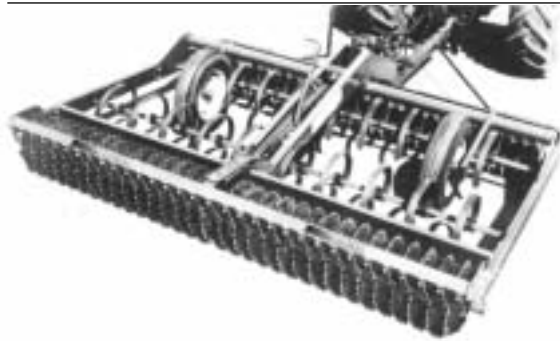

M MODEL PULVI-MULCHERS

Manually operated tooth control with single transport wheels. Rear scrapers are standard on notched rollers. Safety lights and drawbar jack are standard equipment. Requires a 3" x 8" hydraulic cylinder. Hydraulic cylinder not included. Includes 2 - 7.60 x 15 6 Ply Tires. Approximate Set Up Time: 6 hours. Drawbar Horsepower Required: 6/8 per ft.

Model No.	Front Roller	Rear Roller	Rolling Width	Overall Width	No. of Teeth	Approx. Weight	Suggested List Price
WITH CONVENTIONAL "C" TEETH							
M-1241	Notched	Notched	10'4"	11'	19	4017 lbs.	
MC-1241	Crowfoot	Notched	10'4"	11'	19	3872 lbs.	
MCC-1241	Crowfoot	Crowfoot	10'4"	11'	19	3612 lbs.	
WITH S-TINE TEETH - POINTS NOT INCLUDED. ORDER FROM OPTIONS							
MS-1241	Notched	Notched	10'4"	11'	19	3998 lbs.	
MCS-1241	Crowfoot	Notched	10'4"	11'	19	3853 lbs.	
MCCS-1241	Crowfoot	Crowfoot	10'4"	11'	19	3593 lbs.	

OPTIONAL EQUIPMENT

5D-744	Front Scraper Kit					78 lbs.	
7C-189	Land Leveler Kit for all 10'4" M Pulvi-Mulchers					67 lbs.	
4D-184	Travel Link for all M & MD Pulvi Mulchers (except 88" model)					25 lbs.	
2J-149	1-3/8" Heavy Duty Reversible S-Tine Point with Attaching Hardware					1 lb.	
2J-150	2-3/4" Shovel with attaching hardware for S-tines					1 lb.	
9K-363	Hydraulic Cylinder & Hose Kit					40 lbs.	

MD MODEL PULVI-MULCHERS

Manually operated tooth control with dual transport wheels. Rear scrapers are standard on notched rollers. Safety lights and drawbar jack are standard equipment. Requires a 3" x 8" hydraulic cylinder. **Hydraulic cylinder not included.** Includes 4 - 7.60 x 15 6 Ply Tires. Approximate Set Up Time: 6 hours. Drawbar Horsepower Required: 6/8 HP per ft.



Model No.	Front Roller	Rear Roller	Rolling Width	Overall Width	No. of Teeth	Approx. Weight	Suggested List Price
WITH CONVENTIONAL "C" OR RIBBON TEETH							
MD-1481	Notched	Notched	12'4"	13'	23	4886 lbs.	
MDC-1481	Crowfoot	Notched	12'4"	13'	23	4731 lbs.	
MDCC-1481	Crowfoot	Crowfoot	12'4"	13'	23	4456 lbs.	
MD-1641	Notched	Notched	13'8"	14'4"	27	5321 lbs.	
MDC-1641	Crowfoot	Notched	13'8"	14'4"	27	5096 lbs.	
MDCC-1641	Crowfoot	Crowfoot	13'8"	14'4"	27	4736 lbs.	
WITH 10 MM S-TINE TEETH - POINTS NOT INCLUDED. ORDER FROM OPTIONS BELOW							
MDS-1481	Notched	Notched	12'4"	13'	23	4863 lbs.	
MDCS-1481	Crowfoot	Notched	12'4"	13'	23	4708 lbs.	
MDCCS-1481	Crowfoot	Crowfoot	12'4"	13'	23	4433 lbs.	
MDS-1641	Notched	Notched	13'8"	14'4"	27	5294 lbs.	
MDCS-1641	Crowfoot	Notched	13'8"	14'4"	27	5069 lbs.	
MDCCS-1641	Crowfoot	Crowfoot	13'8"	14'4"	27	4713 lbs.	

OPTIONS FOR M, MD & MDS PULVI-MULCHERS

Part No.	Description	Weight	Suggested List Price
5D-191	Front Scraper Kit for Notched Rollers, MD164	100 lbs.	
5D-192	Front Scraper Kit for Notched Rollers, MD148	90 lbs.	
9D-25	Land Leveler Kit for all 12'4" M, MD, MDS Pulvi-Mulchers	80 lbs.	
9D-24	Land Leveler Kit for all 13'8" M, MD, MDS Pulvi-Mulchers	86 lbs.	
4D-184	Travel Link for all M & MD Pulvi Mulchers (except 88" model)	25 lbs.	
2J-149	1-3/8" Heavy Duty Reversible Spring Tine Point with Attaching Hardware	1 lb.	
2J-150	2-3/4" Shovel with attaching hardware for spring tines	1 lb.	
1K-822	Safety Chain Kit	9 lbs.	
9K-363	Hydraulic Cylinder & Hose Kit	40 lbs.	

ML MODEL PULVI-MULCHERS

12'6", 13'10", 15'2" and 18'9"

This series of Pulvi-Mulchers is designed with a spread out frame design that permits good trash flow. It features 20" Ductile notched or Ductile crow-foot rollers, 1 1/2" heavy duty bearings on the roller axles, and heavy duty drawbar. The machine may be equipped with "C" shaped spring teeth or "S" tine teeth. Drawbar jack, 3 1/2 x 16" cylinder, pressure relief valve, and hydraulic hoses up to hitch point are included. Rear scrapers are standard equipment with notched rollers. Includes Warning Light Kit and 4 - 9.5L x 15 6 Ply Tires. Approximate Set Up Time: 8 hours. Drawbar Horsepower Required: 6/8 HP per ft.



ML MODELS WITH 20" DUCTILE ROLLER WHEELS (WHICH CARRY A 5-YEAR LIMITED WARRANTY)

Model No.	Front Roller	Rear Roller	Rolling Width	Overall Width	No. of Teeth	Approx. Weight	Suggested List Price
WITH CONVENTIONAL "C" OR RIBBON TEETH							
ML-1483	Notched	Notched	12'6"	13'6"	23	5390 lbs.	
ML-1643	Notched	Notched	13'10"	14'5"	27	5720 lbs.	
ML-1803	Notched	Notched	15'2"	15'9"	29	6039 lbs.	
ML-2253	Notched	Notched	18'9"	19'6"	35	7201 lbs.	
MCL-1483	Crowfoot	Notched	12'6"	13'6"	23	5348 lbs.	
MCL-1643	Crowfoot	Notched	13'10"	14'5"	27	5730 lbs.	
MCL-1803	Crowfoot	Notched	15'2"	15'9"	29	6014 lbs.	
MCL-2253	Crowfoot	Notched	18'9"	19'6"	35	7138 lbs.	
MLC-1483	Notched	Crowfoot	12'6"	13'6"	23	5251 lbs.	
MLC-1643	Notched	Crowfoot	13'10"	14'5"	27	5543 lbs.	
MLC-1803	Notched	Crowfoot	15'2"	15'9"	29	5860 lbs.	
MLC-2253	Notched	Crowfoot	18'9"	19'6"	35	6988 lbs.	
MCC-1483	Crowfoot	Crowfoot	12'6"	13'6"	23	5209 lbs.	
MCC-1643	Crowfoot	Crowfoot	13'10"	14'5"	27	5472 lbs.	
MCC-1803	Crowfoot	Crowfoot	15'2"	15'9"	29	5835 lbs.	
MCC-2253	Crowfoot	Crowfoot	18'9"	19'6"	35	6924 lbs.	
WITH 12MM S-TINE TEETH — POINTS NOT INCLUDED, ORDER FROM OPTIONS BELOW							
MLS-1483	Notched	Notched	12'6"	13'6"	23	5280 lbs.	
MLS-1643	Notched	Notched	13'10"	14'5"	27	5591 lbs.	
MLS-1803	Notched	Notched	15'2"	15'9"	29	5901 lbs.	
MLS-2253	Notched	Notched	18'9"	19'6"	35	7035 lbs.	
MCLS-1483	Crowfoot	Notched	12'6"	13'6"	23	5238 lbs.	
MCLS-1643	Crowfoot	Notched	13'10"	14'5"	27	5520 lbs.	
MCLS-1803	Crowfoot	Notched	15'2"	15'9"	29	5876 lbs.	
MCLS-2253	Crowfoot	Notched	18'9"	19'6"	35	6972 lbs.	
MLCS-1483	Notched	Crowfoot	12'6"	13'6"	23	5141 lbs.	
MLCS-1643	Notched	Crowfoot	13'10"	14'5"	27	5414 lbs.	
MLCS-1803	Notched	Crowfoot	15'2"	15'9"	29	5722 lbs.	
MLCS-2253	Notched	Crowfoot	18'9"	19'6"	35	6822 lbs.	
MCCS-1483	Crowfoot	Crowfoot	12'6"	13'6"	23	5099 lbs.	
MCCS-1643	Crowfoot	Crowfoot	13'10"	14'5"	27	5343 lbs.	
MCCS-1803	Crowfoot	Crowfoot	15'2"	15'9"	29	5697 lbs.	
MCCS-2253	Crowfoot	Crowfoot	18'9"	19'6"	35	6758 lbs.	

OPTIONAL EQUIPMENT FOR ML AND MLS PULVI-MULCHERS

Part No.	Description	Approx. Suggested Weight	List Price	Part No.	Description	Approx. Suggested Weight	List Price
2J-149	1-3/8" Rev. Point w/Hdwe. for S-Tines	1 lbs.		3K-690	V-Leveler for ML-2253	240 lbs.	
2J-150	2-3/4" Shovel w/Hdwe. for S-Tines	1 lbs.		3K-691	V-Leveler for ML-1643/1803	221 lbs.	
1K-83	Front Scraper Kit for ML-1483	108 lbs.		3K-692	V-Leveler for ML-1483	196 lbs.	
1K-84	Front Scraper Kit for ML-1643	118 lbs.		8J-127	Rear Hitch	74 lbs.	
1K-85	Front Scraper Kit for ML-1803	129 lbs.		1K-822	Safety Chain Kit	9 lbs.	
1K-974	Front Scraper Kit for ML-2253	159 lbs.		9J-221	Independent Tooth Control for C-Tines	34 lbs.	
8J-141	Land Leveler for ML-1483	105 lbs.		9J-222	Independent Tooth Control for S-Tines	32 lbs.	
8J-140	Land Leveler for ML-1643	127 lbs.			(Jacks or Cylinders needed to complete 9J-221 & 9J-222 Kits)		
8J-139	Land Leveler for ML-1803	134 lbs.		7J-237	Ratchet Jack Kit		
1K-973	Land Leveler for ML 2253	169 lbs.			(Used with 9J-221 or 9J-222 Kits)	15 lbs.	
				9K-364	Cylinder and Hose Kit		
					(Used with 9J-221 or 9J-222 Kits)	60 lbs.	

For Independent Tooth Control Kits 9J-221 and 9J-222: (1) ratchet jack or (1) hydraulic cylinder with hoses is required. Kit 7J-237 includes (1) ratchet jack and Kit 9K-364 includes (1) hydraulic cylinder with hoses.

WL SERIES

FLAT FOLD — HYDRAULIC WING
21'8" AND 25'

PULVI-MULCHERS



This wing model Pulvi-Mulcher features the 20" Ductile Iron Notched or Ductile Iron Crowfoot wheels which carry a 5-year limited warranty against breakage, 1 1/2" heavy duty bearings, and heavy duty drawbar. Wings fold flat and give the machine a transport width of 13'11". Hydraulic cylinders, relief valve, hydraulic hoses to hitch point included. Rear scrapers are standard equipment with notched wheels. Safety warning lights and 4 - 11L x 15 8 Ply Tires are included. Approximate Set Up Time: 14-16 hours. Drawbar Horsepower Required: 6/8 HP per ft.

WL MODELS WITH 20" DUCTILE ROLLER WHEELS (WHICH CARRY A 5-YEAR LIMITED WARRANTY)

Model No.	Front Roller	Rear Roller	Rolling Width	Overall Width	No. of Teeth	Approx. Weight	Suggested List Price
WITH CONVENTIONAL "C" TEETH							
WL-2603	Notched	Notched	21'8"	22'5"	41	9783 lbs.	
WL-3003	Notched	Notched	25'	25'6"	47	10,215 lbs.	
WLC-2603	Notched	Crowfoot	21'8"	22'5"	41	9495 lbs.	
WLC-3003	Notched	Crowfoot	25'	25'6"	47	9943 lbs.	
WCL-2603	Crowfoot	Notched	21'8"	22'5"	41	9680 lbs.	
WCL-3003	Crowfoot	Notched	25'	25'6"	47	10,153 lbs.	
WCC-2603	Crowfoot	Crowfoot	21'8"	22'5"	41	9392 lbs.	
WCC-3003	Crowfoot	Crowfoot	25'	25'6"	47	9881 lbs.	
WITH 12MM S-TIME TEETH - POINTS NOT INCLUDED, ORDER FROM OPTIONS BELOW							
WLS-2603	Notched	Notched	21'8"	22'5"	41	9594 lbs.	
WLS-3003	Notched	Notched	25'	25'6"	47	10,026 lbs.	
*WLS-3003I	Notched	Notched	25'	25'6"	47	9903 lbs.	
WLCS-2603	Notched	Crowfoot	21'8"	22'5"	41	9306 lbs.	
WLCS-3003	Notched	Crowfoot	25'	25'6"	47	9754 lbs.	
WCLS-2603	Crowfoot	Notched	21'8"	22'5"	41	9491 lbs.	
WCLS-3003	Crowfoot	Notched	25'	25'6"	47	9964 lbs.	
WCCS-2603	Crowfoot	Crowfoot	21'8"	22'5"	41	9203 lbs.	
WCCS-3003	Crowfoot	Crowfoot	25'	25'6"	47	9692 lbs.	

*Requires (1) 9J-230 or (1) 3K-638 to complete

OPTIONS FOR 21'8" AND 25' PULVI-MULCHERS

Part No.	Description	Approx. Weight	Suggested List Price
1K-86	Front Scraper for WL-2603	196 lbs.	
8J-702	Land Levelers for WL-2603	204 lbs.	
1K-87	Front Scrapers for WL-3003	222 lbs.	
8J-703	Land Leveler for WL-3003	215 lbs.	
9J-237	Independent Tooth Control For Use w/S-Tines	96 lbs.	
9J-236	Independent Tooth Control For Use w/C-Tines		
9J-230	Ratchet Jack Kit (Used with 9J-237 or 9J-236 Kits)	51 lbs.	
3K-638	Cylinder and Hose Kit (Used with 9J-237 or 9J-236 Kits)	160 lbs.	
9K-446	Hydraulic Conversion Kit (For Independent Wing Control)	16 lbs.	
8J-709	Rear hitch for 21'8" and 25' models	74 lbs.	
2J-149	1-3/8" Point with attaching hardware for S-Tines	1 lb.	
2J-150	2-3/4" Shovel with attaching hardware for S-Tines	1 lb.	
1K-789	Safety Chain Kit	15 lbs.	

For Independent Tooth Control Kits 9J-237 and 9J-236: (3) ratchet jacks or (3) hydraulic cylinders with hoses are required. Kit 9J-230 includes (3) ratchet jacks and Kit 3K-638 includes (3) hydraulic cylinders with hoses.

WL-360, 30 FOOT PULVI-MULCHERS

FLAT FOLD — HYDRAULIC WING



This wing Pulvi-Mulcher features the 20" ductile iron rollers and 1-1/2" heavy-duty bearings on the roller axles. The wings fold flat and give the machine a transport width of 16'9". Overall length is 19'10". Overall height in transport is 6'4", road clearance is 10". This machine may be equipped with "C" shaped spring teeth or "S" tine teeth. Rear scrapers on notched rollers, drawbar jack, cylinders and hoses are standard. Requires two hydraulic systems on tractor. Includes Warning Light Kit and 4 - 12.5L x 16 12 Ply Tires and Tubes. Approximate Set Up Time: 20 hours. Drawbar Horsepower Required: 6/8 HP per ft.

WL MODELS WITH 20" DUCTILE ROLLER WHEELS (WHICH CARRY A 5-YEAR LIMITED WARRANTY)

Model No.	Front Roller	Rear Roller	Rolling Width	Overall Width	No. of Teeth	Approx. Weight	Suggested List Price
WITH CONVENTIONAL "C" TEETH							
WL-360	Notched	Notched	30'	30'10"	59	13,718 lbs.	
*WL-360I	Notched	Notched	30'	30'10"	59	13,595 lbs.	
WLC-360	Notched	Crowfoot	30'	30'10"	59	13,546 lbs.	
WCL-360	Crowfoot	Notched	30'	30'10"	59	13,774 lbs.	
WCC-360	Crowfoot	Crowfoot	30'	30'10"	59	13,602 lbs.	
WITH 12 MM S-TINE TEETH — POINTS NOT INCLUDED — ORDER FROM OPTIONS BELOW							
WLS-360	Notched	Notched	30'	30'10"	59	13,272 lbs.	
*WLS-360I	Notched	Notched	30'	30'10"	59	13,149 lbs.	
WLCS-360	Notched	Crowfoot	30'	30'10"	59	13,100 lbs.	
WCLS-360	Crowfoot	Notched	30'	30'10"	59	13,328 lbs.	
WCCS-360	Crowfoot	Crowfoot	30'	30'10"	59	13,156 lbs.	

*Working depth of teeth is controlled manually with ratchet jacks Instead of hydraulic cylinders.

OPTIONAL EQUIPMENT

Part No.	Description	Approx. Weight	Suggested List Price
1K-789	Safety Chain Kit	15 lbs.	
9J-614	Land Leveler Kit	383 lbs.	
9J-619	Front Scraper Kit	273 lbs.	
9J-545	Rear Hitch Kit	161 lbs.	
2J-149	1-3/8" Reversible Point with Attaching Hardware	1 lb.	
2J-150	2-3/4" Shovel with Attaching Hardware	1 lb.	
3K-028	S-Tine Shank, Clamp, Hardware	9 lbs.	
For independent machine raising-lowering and wing folding (requires 3 hydraulic systems on tractor)			
9K-010	Independent Tooth Control Kit Allows separate machine lift and tooth control hydraulic circuits	10 lbs.	