


SERIES 04 COMPACTION COMMANDER

The Series 04 Compaction Commander features the new 1P-739 Coil Spring Shank. Designed to work in the toughest conditions. This reset shank features 16" of trip height. New turnbuckle adjusted gauge wheels allow the unit to operate as deep as 20" to remove deep compaction layers and improve water management. **Points and wearstrips not included; must be ordered from options.** Approximate Set Up Time: 1 hour per shank. Drawbar Horsepower Required: 35-50 HP per shank.

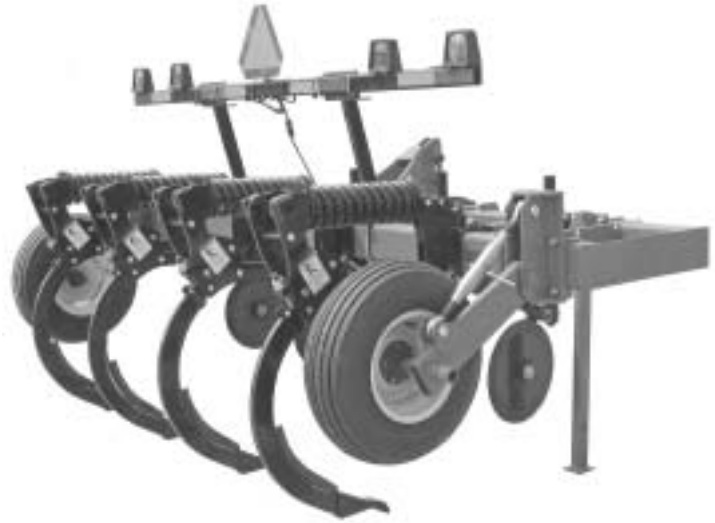

- Three-point hitch Category II or III – 3 to 6 shank, Cat. III or IV narrow 7 & 8 shank.
- Transport safety lights are standard equipment.
- Coil spring auto-reset shanks with 16" trip height.
- 39" shank under-frame clearance.
- Front and rear frame members 5" x 7".
- Parking stands standard equipment.
- 20" straight coulters on front frame member.
- 24" or 30" shank spacing.
- Turnbuckle gauge wheels with 9.5L x 15 tires.

Model No.	Description	Approx. Weight	Tool Bar Length	Suggested List Price
3 POINT HITCH SINGLE BAR MODELS 30" SPACING				
CCS3304	3 Shank Single Bar Model w/Turnbuckle Adjust Gauge Wheels	2390 lbs.	117"	
CCS5304	5 Shank Single Bar Model w/Turnbuckle Adjust Gauge Wheels	3265 lbs.	177"	
3 POINT HITCH DOUBLE BAR MODELS 30" SPACING				
CCD3304	3 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	3170 lbs.	117"	
CCD4304	4 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	3913 lbs.	150"	
CCD5304	5 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	4436 lbs.	177"	
CCD6304	6 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	5175 lbs.	210"	
CCD7304	7 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	5809 lbs.	237"	
CCD8304	8 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	6552 lbs.	270"	
3 POINT HITCH DOUBLE BAR MODELS 24" SPACING				
CCD5244	5 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	4375 lbs.	150"	
CCD6244	6 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	4897 lbs.	177"	
CCD9244	9 Shank Double Bar Model w/Turnbuckle Adjust Gauge Wheels	6736 lbs.	237"	
OPTIONAL EQUIPMENT				
3K-813	15" Set Back Extension Kit for CCS Models (one per shank)	65 lbs.		
3K-814	15" Set Back Extension Kit for CCD Models (one per shank)	120 lbs.		
6K-857	Coulter Assembly (if not wanted on double bar models: deduct)	-67 lbs.		
OPTIONAL POINTS & WEARSTRIPS				
2K-118	Coverboard for use with 6K-585 Wearstrip (one per shank)	10.4 lbs.		
6K-585	Flat Wearstrip w/Hardware	7.7 lbs.		
3K-819	V-shaped Alloy Wearstrip w/Hardware	11.0 lbs.		
3K-820	2 1/2" Flat Point w/Hardware	6.5 lbs.		
7K-365	2 1/2" Steel Point w/Hardware	11.1 lbs.		
7K-366	7" Winged Steel Point w/Hardware	13.1 lbs.		
7K-367	10" Winged Steel Point w/Hardware	15.1 lbs.		
6K-853	2" V-Cast Steel Point w/Hardware	13.4 lbs.		